
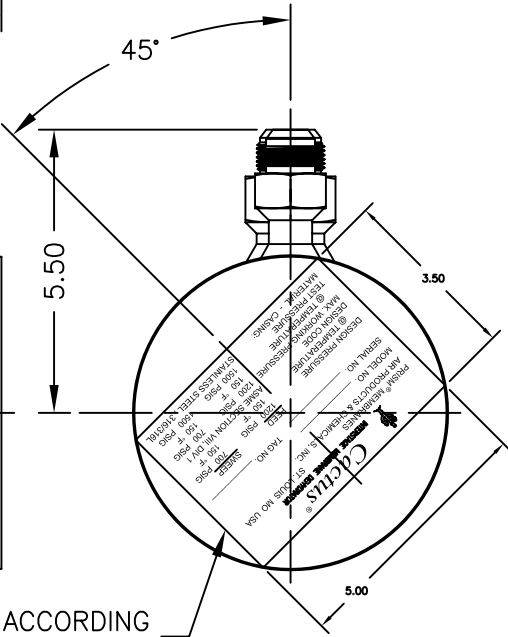


- PORTS**
- 1 - SWEEP + PERMEATE OUTLET
 - 2 - FEED INLET
 - 3 - PRODUCT OUTLET
 - 4 - SWEEP INLET

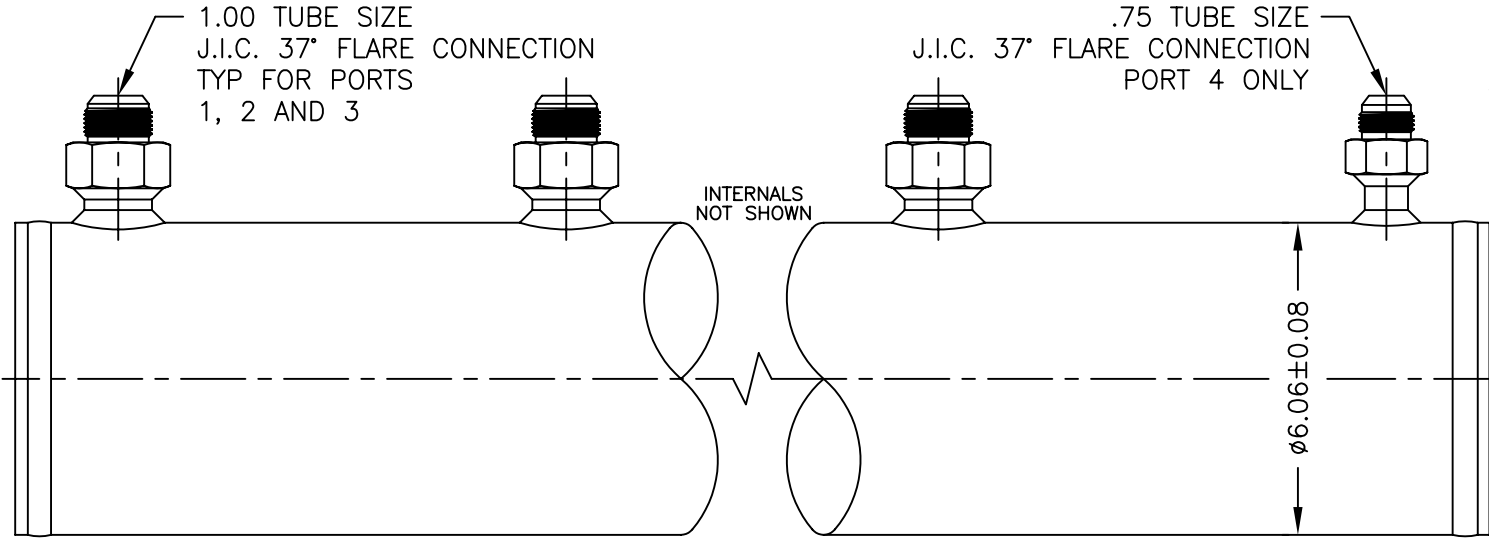

MAXIMUM OPERATING TEMPERATURE: 150°F
 MAXIMUM OPERATING PRESSURE: FEED/PRODUCT, 1200 PSIG
 SWEEP/PERMEATE, 1000 PSIG
 MATERIAL: 316 STAINLESS STEEL
 WEIGHT (INCLUDING INTERNALS): 120 LBS

Cactus® Dryer

NAMEPLATE PLACED ACCORDING TO THIS ORIENTATION.

DRAWN: KMJ 3/10/99 APPROVE: WAU 3/10/99
 THIRD ANGLE PROJECTION

PRISM® Membranes

PROPRIETARY NOTICE
 THIS DOCUMENT, AND THE INFORMATION CONTAINED HEREIN, IS THE PROPERTY OF AIR PRODUCTS PRISM MEMBRANES (APPM) AND MUST BE KEPT CONFIDENTIAL AND NOT DISCLOSED IN WHOLE OR IN PART TO ANY THIRD PARTY WITHOUT THE EXPRESS WRITTEN PERMISSION OF APPM. APPM AUTHORIZES THE NECESSARY AND REASONABLE USE OF THIS DOCUMENT, AND THE INFORMATION HEREIN, SOLELY FOR THE EVALUATION, INSTALLATION, OPERATION AND MAINTENANCE OF PRISM MEMBRANE SYSTEMS. NO OTHER USE IS AUTHORIZED.

AIR PRODUCTS PRISM Membranes

MODEL HD4030-12-A0-0P

TITLE EXTERNAL DIMENSIONS

MATERIAL: NOTED

NO. REQ'D: 1 SCALE: 1:4 SHEET 1 OF 1

DWG SIZE A DRAWING / PART NO. 2995-50-06 REVISION 5

REV	ECR	DESCRIPTION OF CHANGE	BY	DATE	APP
5	06-009	Chg. fiber desig. in model no. Was: C2 Now: I2	KMJ	1/31/06	WAU
4	02-085	SWEEP/PERMEATE PRESSURE RATING 1000 PSIG	WAU	06/04/02	WAU
3	01-014	LOGO CHANGE; REV VESSEL O.D.	KMJ	6/20/01	WAB
2	00-014	MODEL NUMBER WAS PPC-1500	KMJ	9/25/00	WAU
1	99-021	CHANGE MATERIAL TO 316 SS	WAU	09/24/99	WAU